


RS


Twin Straight Bore Coolant Holes

310mm OAL

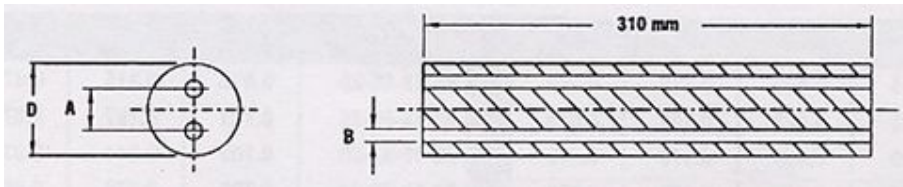

Order No. DIMENSIONS* Grades BK10UF and BK12UF

RS	Diameter	A	B
RS-10-18-08	4.2	1.8	0.80
RS-12.5-20-08	5.2	2.0	0.80
RS-15-15-08	6.3	1.5	0.80
RS-15-30-10	6.3	3.0	1.00
RS-18-15-08	7.3	1.5	0.80
RS-18-35-10	7.3	3.5	1.00
RS-20-15-08	8.3	1.5	0.80
RS-20-20-08	8.3	2.0	0.80
RS-20-26-10	8.3	2.6	1.00
RS-20-40-10	8.3	4.0	1.00
RS-23-26-10	9.3	2.6	1.00
RS-23-40-14	9.3	4.0	1.40
RS-25-26-10	10.3	2.6	1.00
RS-25-50-14	10.3	5.0	1.40
RS-26-35-12	11.3	3.5	1.20
RS-26-50-14	11.3	5.0	1.40
RS-28-35-12	12.3	3.5	1.20
RS-28-60-175	12.3	6.0	1.75
RS-32-35-12	13.3	3.5	1.20
RS-32-60-175	13.3	6.0	1.75
RS-35-50-15	14.3	5.0	1.50
RS-35-70-175	14.3	7.0	1.75
RS-38-50-15	15.3	5.0	1.50
RS-38-70-20	15.3	7.0	2.00
RS-40-50-15	16.3	5.0	1.50
RS-40-80-20	16.3	8.0	2.00
RS-43-80-20	17.3	8.0	2.00




Main: 248-693-9202

Fax: 248-693-9210

contact@carbide Tooling Supply.com

RS-43-62-20	17.3	6.2	2.00
RS-45-62-20	18.3	6.2	2.00
RS-45-90-20	18.3	9.0	2.00
RS-48-62-20	19.3	6.2	2.00
RS-48-90-20	19.3	9.0	2.00
RS-50-100-25	20.4	10.0	2.50
RS-50-62-20	20.4	6.2	2.00
RS-52-100-25	21.4	10.0	2.50
RS-52-62-20	21.4	6.2	2.00
RS-55-110-25	22.4	11.0	2.50
RS-55-62-20	22.4	6.2	2.00
RS-57-110-25	23.4	11.0	2.50
RS-57-75-20	23.4	7.5	2.00
RS-60-120-30	24.4	12.0	3.00
RS-60-75-20	24.4	7.5	2.00
RS-63-120-30	25.4	12.0	3.00
RS-63-75-20	25.4	7.5	2.00
RS-65-130-30	26.4	13.0	3.00
Description	28.4	14.0	3.00
Description	30.4	14.0	3.00
Description	32.4	14.0	3.00
Description	34.4	14.0	3.00

*All dimensions = MM
Special grades can be quoted.
330mm OAL available on some items.



Main: 248-693-9202

Fax: 248-693-9210

contact@carbide Toolingsupply.com